
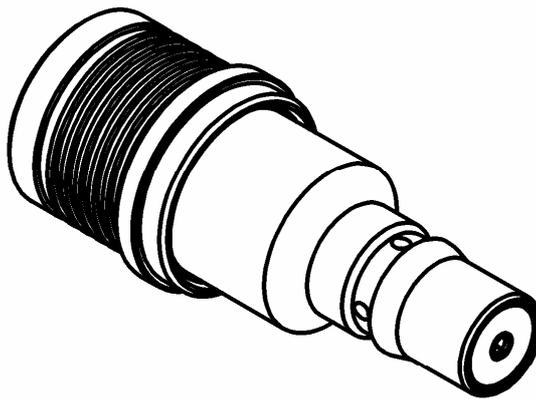
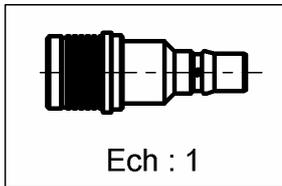


6GHZ 1W 20DB QMA ATTENUATOR

R411.720.124

Series :
ATTENUATEUR

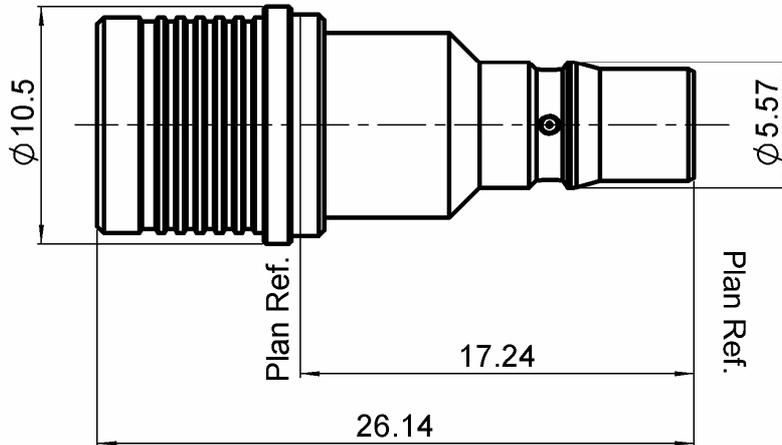

All dimensions are in mm.

COMPONENTS	MATERIALS	PLATING(μm)
BODY	BRASS	BBR 2
MALE CENTER CONTACT	BERYLLIUM COPPER	GOLD 1.3 OVER COPPER 2.5
FEMALE CENTER CONTACT	BERYLLIUM COPPER	GOLD 1.3 OVER COPPER 2.5
OUTER CONTACT	BRASS	BBR 2
INSULATOR	PTFE	
GASKET		
SUBSTRATE	ALUMINA	
RESISTOR	THICK FILM	
OTHERS PARTS		

Issue : 0915 C

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



6GHZ 1W 20DB QMA ATTENUATOR**R411.720.124**Series :
ATTENUATEUR**ELECTRICAL CHARACTERISTICS**

Frequency (GHz)	2	2 - 6
V.S.W.R (\leq)	1.20	1.30
Deviation(\pm dB)	0.70	0.70

Operating Frequency Range		GHz
Impedance	50	Ω
Nominal Attenuation	20	dB
Peak power at 25°C (1 μ s, 1%)	100	W
Average power at 25°C	1	W (Free Air Cooled)
		W (Conduction Cooled)


MECHANICAL CHARACTERISTICS

Connectors QMA
Weight 6,2610 g

ENVIRONMENTAL CHARACTERISTICS

Operating temperature range	-40 / +85 °C
Storage temperature range	-40 / +85 °C

Power derating Versus temperature

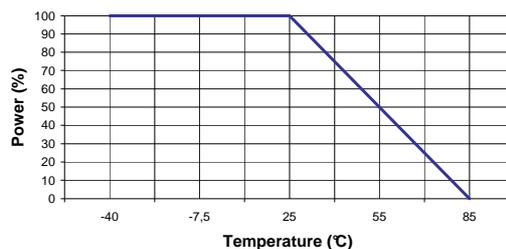**SPECIFICATION****OTHER CHARACTERISTICS**

Issue : 0915 C

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL 