

PACKAGING

BLANK: TUBES (SEE NOTE 13)
-TR: TAPE & REEL (SEE NOTES 14 & 15)
(SEE FIG 8, SHT 4)
(AVAILABLE ON 2-36 POS ONLY)
-FR: FULL REEL QTY TAPE & REEL
(SEE NOTES 14 & 15)
(SEE FIG 8, SHT 4)
(AVAILABLE ON 2-36 POS ONLY)

PICK & PLACE PAD

-P: PICK & PLACE PAD
(ONLY AVAILABLE ON -SV & -DV, 4 POS MIN)
(-SV: USE PPP-09; -DV: USE PPP-03;
SEE FIG 5, SHT 3)
-M: METAL PICK & PLACE PAD
(ONLY AVAILABLE ON -DV)
(USE LMP-03, SEE FIG 7, SHT 3)
-K: POLYIMIDE FILM PAD
(AVAILABLE ON 3 POS MIN,
FOR -SV USE K-DOT-.118-.219-.005,
FOR -DV USE K-DOT-.217-.313-.005)
(SEE FIG 6, SHT 3)

POLARIZING OPTION

-XX INDICATES POSITION No
(USE PK-02-N)

OPTION

-LC: LOCKING CLIP
(NOT AVAILABLE ON -SV)
(USE LC-06-TM, SEE FIG 1,
FIG 2 & 3, SHT 2 & NOTES 6 & 7)
-A: MOLDED ALIGNMENT PIN
(AVAILABLE ON -DV ONLY)
(USE MMS-XX-D-VXX, SEE FIG 4, SHT 3)

NO OF POSITIONS

-02 THRU -40
(PER ROW)

LEAD STYLE

-02: SURFACE MOUNT





PLATING SPECIFICATION

-S: 30μ" SELECTIVE GOLD IN CONTACT AREA,
MATTE TIN TAIL
-L: 10μ" SELECTIVE GOLD IN CONTACT AREA,
MATTE TIN TAIL
-F: 3μ" SELECTIVE GOLD IN CONTACT AREA,
MATTE TIN TAIL
** -T: MATTE TIN OVER ENTIRE CONTACT
-LTL: 10μ" SELECTIVE GOLD IN CONTACT AREA,
TIN LEAD (90/10 ±5%) TAIL
-SM: 30μ" SELECTIVE GOLD IN CONTACT AREA,
MATTE TIN TAIL
-LM: 10μ" SELECTIVE GOLD IN CONTACT AREA,
MATTE TIN TAIL
-FM: 3μ" SELECTIVE GOLD IN CONTACT AREA,
MATTE TIN TAIL
** -TM: MATTE TIN OVER ENTIRE CONTACT
-H: 30μ" GOLD IN CONTACT AREA,
3μ" GOLD ON TAIL

ENTRY/ROW SPECIFICATION

-SH: SINGLE ROW, HORIZONTAL ENTRY
-DH: DOUBLE ROW, HORIZONTAL ENTRY
-SV: SINGLE ROW, VERTICAL (TOP) ENTRY
-DV: DOUBLE ROW, VERTICAL (TOP) ENTRY


** = AVAILABLE TO EXISTING CUSTOMERS ONLY

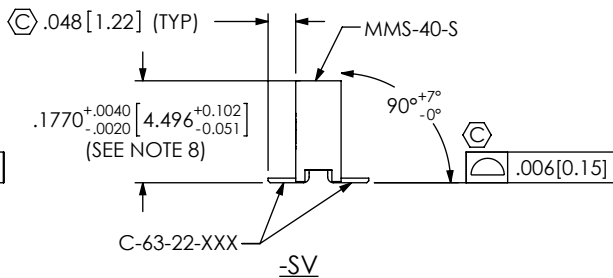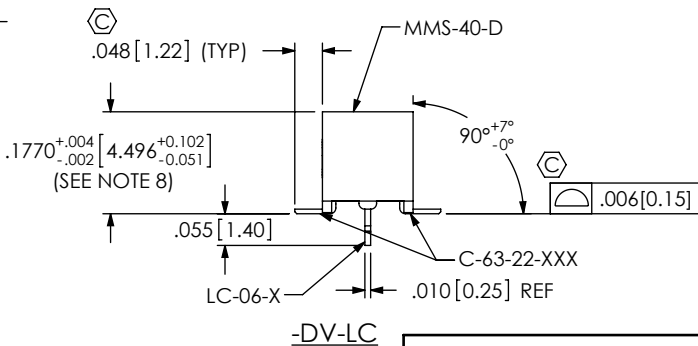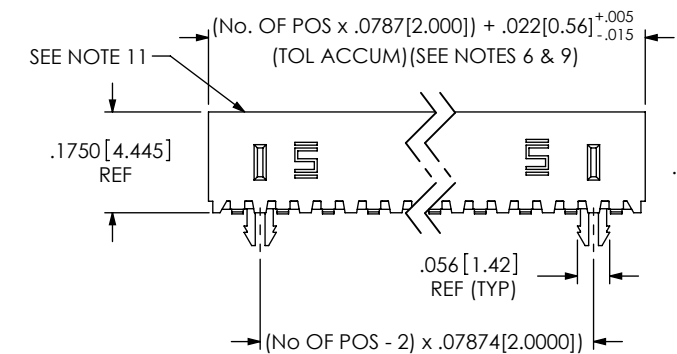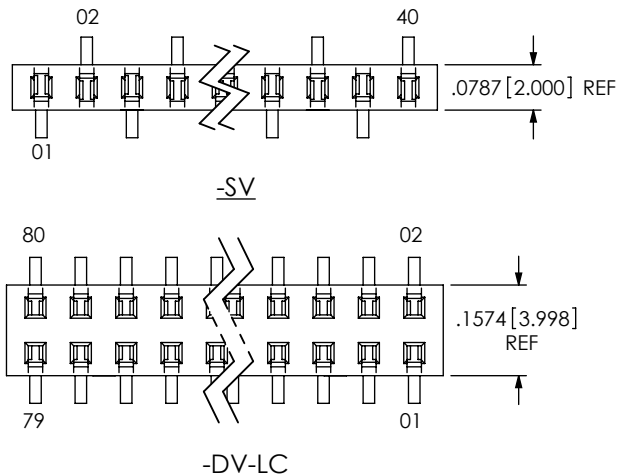

NOTES:

1. © REPRESENTS A CRITICAL DIMENSION.
2. MAXIMUM ALLOWABLE SWAY: 2° IN EITHER DIRECTION
3. MAXIMUM BURR ALLOWANCE: .003 [0.08]
4. MAXIMUM CUT FLASH: .020 [0.51].
5. MINIMUM RETENTION FORCE: SINGLE ROW: .5 LB, DOUBLE ROW: 1 LB
6. CUT BODIES FROM MMS-40-D OR MMS-40-S FOR ALL STYLES EXCEPT -LC.
FOR -LC, USE POSITIONALIZED BODIES. 3 POSITION -DV-LC PARTS WILL HAVE 1 LOCKING CLIP.
7. DUE TO THE HIGH AMOUNT OF INSERTION FORCE NEEDED, THE -LC OPTION IS
NOT COMPATIBLE WITH AUTO PLACEMENT. SAMTEC RECOMMENDS MANUAL
PLACEMENT FOR ALL ASSEMBLIES WITH THE -LC OPTION.
8. THIS DIMENSION TO BE MEASURED AT BEND.
9. FOR -SV LEAD STYLE, EVEN POSITON CUTS LOSE 2 POSITIONS PER CUT; ODD
POSITION CUTS LOSE 1 POSITION PER CUT.
10. LEAD STYLE -02-SH, POSITIONS 2 THRU 4 TO BE PACKAGED IN BOXES. ALL OTHER ROW
SPECIFICATIONS SHOULD BE TUBED ACCORDING TO TABLE 2, REGARDLESS OF POSITION.
11. PK-02-N TO BE INSERTED FROM THIS SIDE.
12. 4 POSITION PART WITH -P OPTION MUST SHIP IN -TR PACKAGING.
13. TUBES ARE STANDARD PACKAGING.
14. ORDERS WILL BE PACKAGED ACCORDING TO THE SAMTEC PACKAGING EFFICIENCY
STANDARDS (SPES) FOUND ON WWW.SAMTEC.COM
15. ATTACH LABEL TO EACH REEL

FIG 1
MMS-140-02-XXX-XV-LC SHOWN

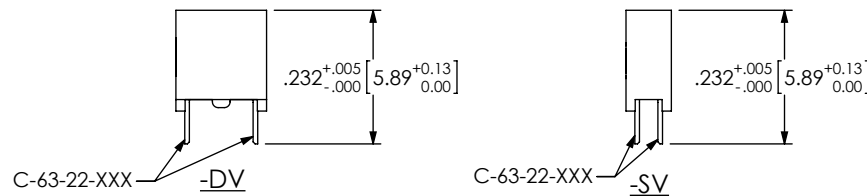

IN-PROCESS

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES.

TOLERANCES ARE:

DECIMALS ANGLES
.XX: ±.01 [0.3] 2°
.XXX: ±.005 [0.13]
.XXXX: ±.0020 [0.051]

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS CONFIDENTIAL AND
PROPRIETARY INFORMATION AND ALL DESIGN,
MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS
AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC,
INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE
OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR
REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY
OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS
WRITTEN CONSENT OF SAMTEC, INC.

MATERIAL: DO NOT SCALE DRAWING SHEET SCALE: 3:1
INSULATOR: VECTRA E130I, COLOR: BLACK
CONTACT: PHOS BRONZE

DESCRIPTION:
2mm SURFACE MOUNT BOX CONNECTOR STRIP ASM

DWG. NO.
MMS-1XX-02-XXX-XX-XX-XX-X-XX

BY: BRATCHER 04/01/1994 SHEET 1 OF 4

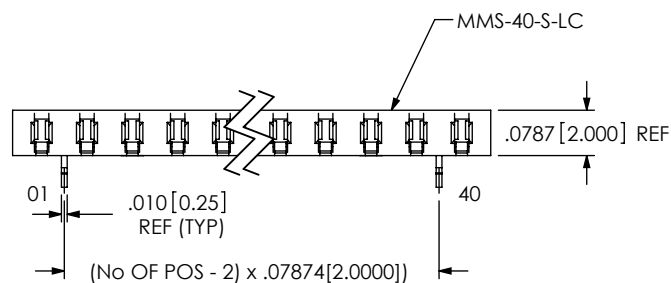


FIG 2
MMS-140-02-XXX-SH-LC SHOWN










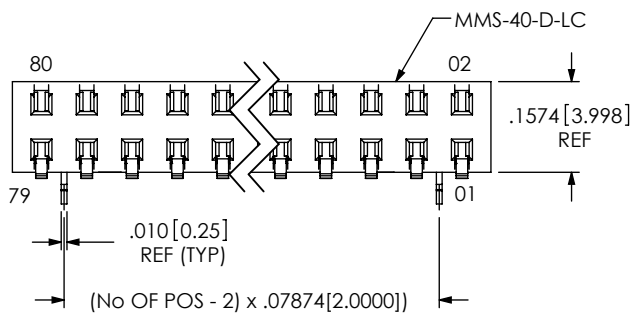


FIG 3
MMS-140-02-XXX-DH-LC SHOWN

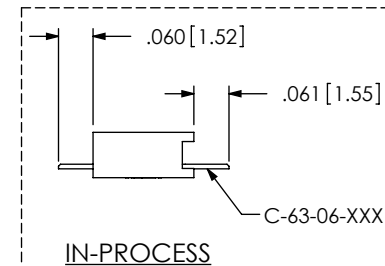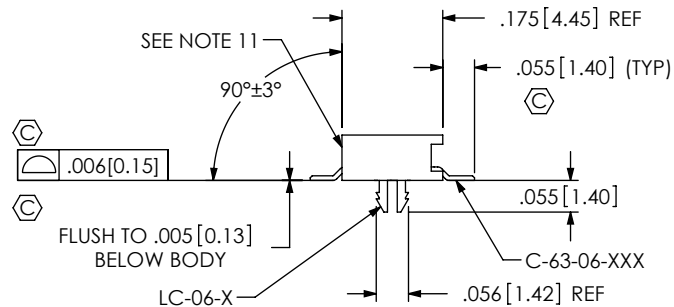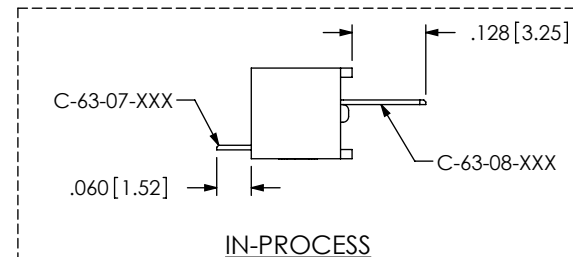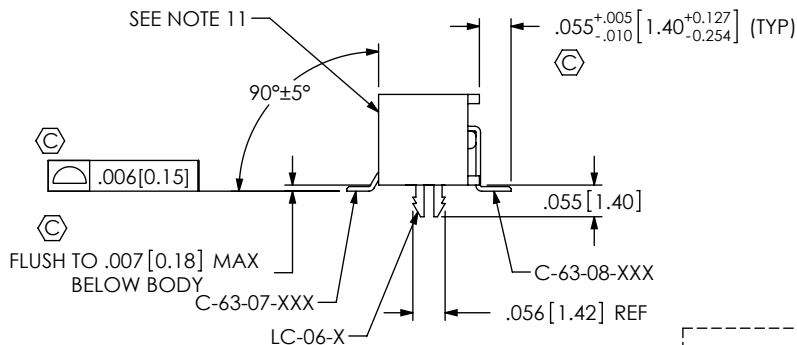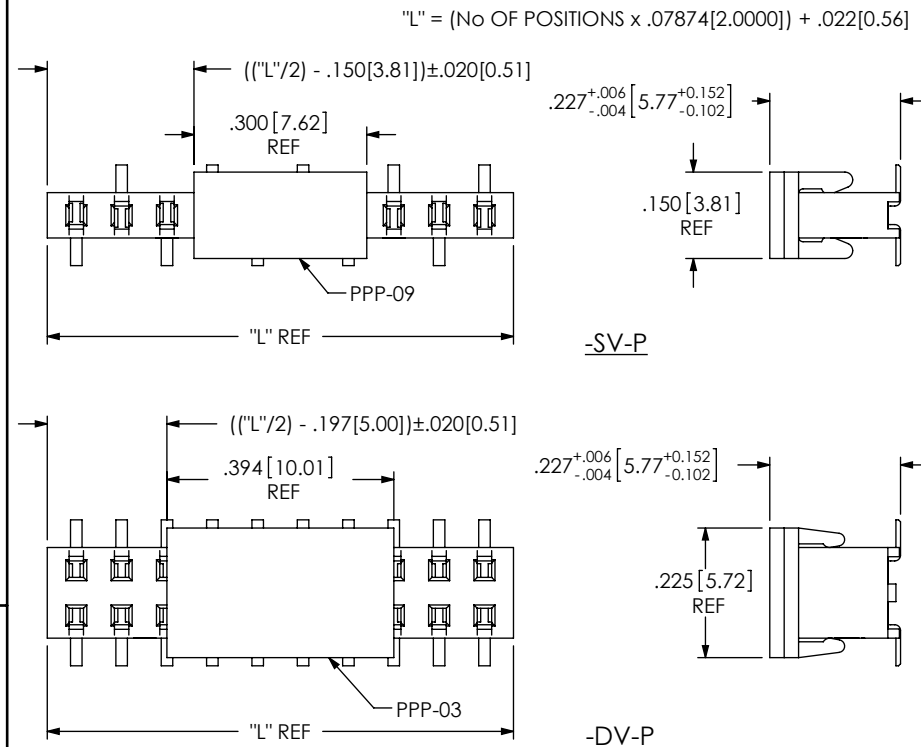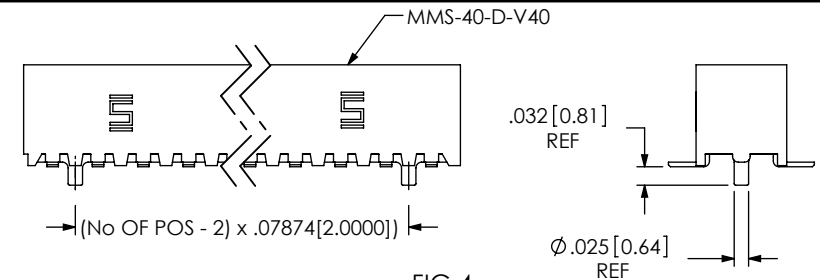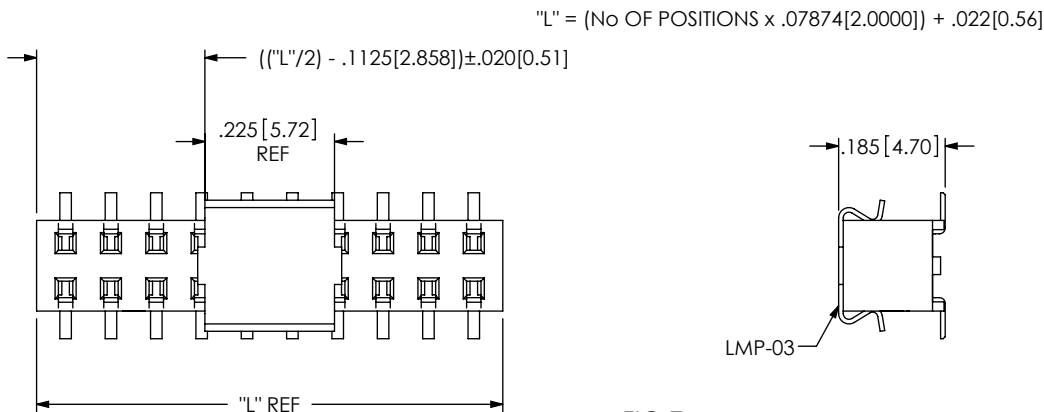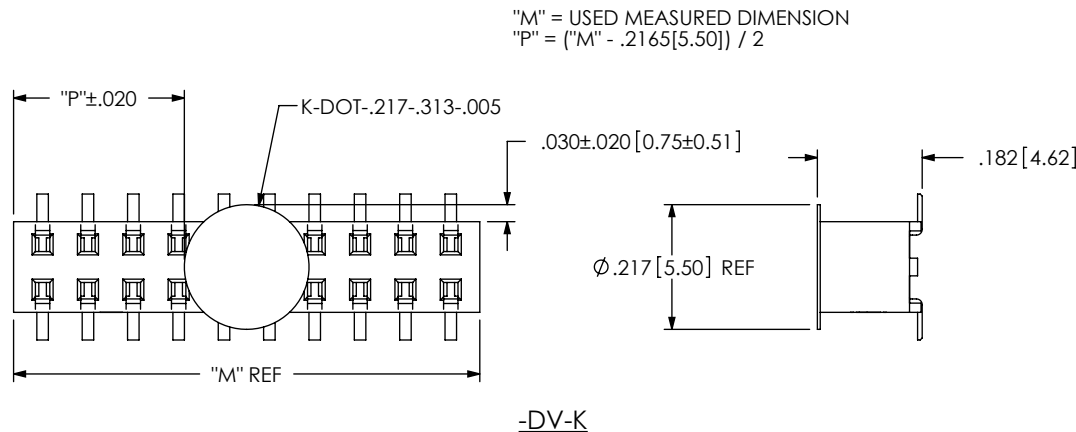

PROPRIETARY NOTE THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.	
DO NOT SCALE DRAWING SHEET SCALE: 3:1	DESCRIPTION: 2mm SURFACE MOUNT BOX CONNECTOR STRIP ASM DWG. NO. MMS-1XX-02-XXX-XX-XX-XX-X-XX BY: BRATCHER 04/01/1994
F:\DWG\MISC\MKTG\MMS-1XX-02-XXX-XX-XX-XX-X-XX-MKT.SLDDRW	520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322 SHEET 2 OF 4

"R" = USED MEASURED DIMENSION
 "S" = ("R" - .118[3.00]) / 2

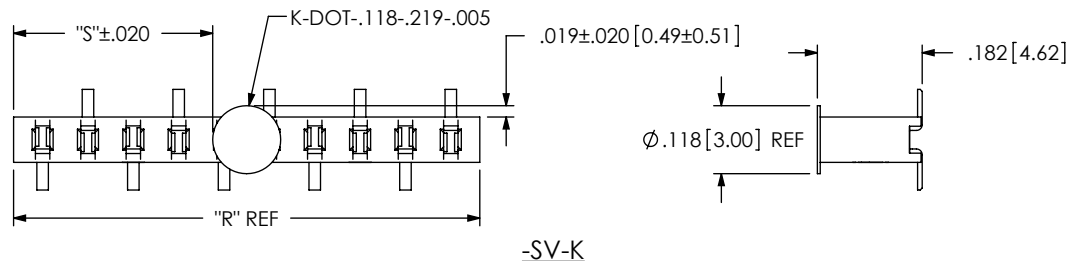

PROPRIETARY NOTE
 THIS DOCUMENT CONTAINS CONFIDENTIAL AND
 PROPRIETARY INFORMATION AND ALL DESIGN,
 MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS
 AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC,
 INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE
 OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR
 REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY
 OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS
 WRITTEN CONSENT OF SAMTEC, INC.

samtec
 520 PARK EAST BLVD, NEW ALBANY, IN 47150
 PHONE: 812-944-6733 FAX: 812-948-5047
 e-Mail: info@SAMTEC.com code 55322

DO NOT SCALE DRAWING

SHEET SCALE: 3:1

DESCRIPTION:


2mm SURFACE MOUNT BOX CONNECTOR STRIP ASM

DWG. NO.

MMS-1XX-02-XXX-XX-XX-XX-X-XX

BY: BRATCHER 04/01/1994

SHEET 3 OF 4

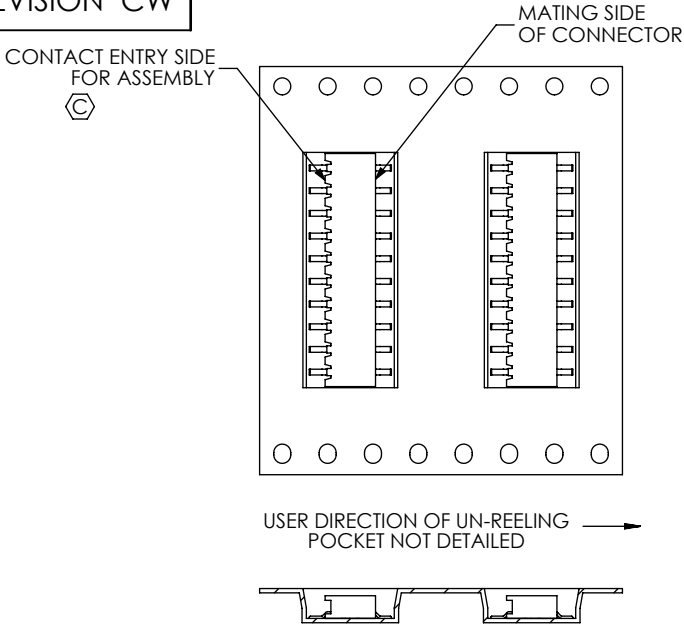

MMS-110-02-XXX-SH SHOWN FOR ORIENTATION OF -SH & -DH STYLES
(MMS-103-02-X-LC, POS 1 TO FACE ROUND HOLES)

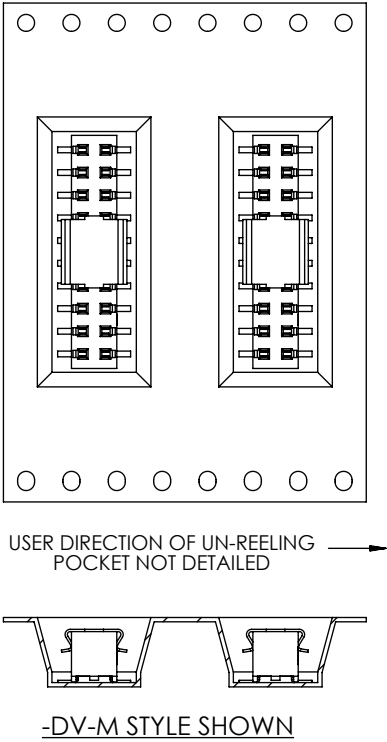


FIG 8
-TR: TAPE & REEL PACKAGING











FIG 9
TUBE PACKAGING OPTIONS

TABLE 2 (#1 POSITION TO BE TUBED IN DIRECTION OF ARROW)		
LEAD STYLE	PACKAGING TUBE	PLUG
-DV, -DV-LC, -DV-A	PT-1-24-02-17	TP-09
-DV-M, -DV-LC-M, -DV-A-M	PT-1-24-01-63	TP-24
-DV-K, -DV-LC-K, -DV-A-K	PT-1-24-02-63	TP-24
*** -DV-P, *** -DV-LC-P, *** -DV-A-P	PT-BKT001	TP-09
* -SH, -SH-LC	PT-1-24-02-16	TP-24
-DH	PT-1-24-02-17	TP-03
*** -DH-P, -DH-K	PT-1-24-06-17	TP-24
-DH-LC	PT-1-24-02-17	TP-09
-SV (NOT -02 THRU -04 POS)	PT-1-24-01-16	TP-12
-SV (-02 THRU -04 POS ONLY)	PT-1-24-01-68	TP-12
*** -SV-P	PT-1-24-13-09	TP-24
-SV-K	PT-1-24-03-63	TP-24

* SEE NOTE 10
*** SEE NOTE 12

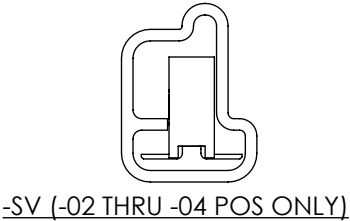

PROPRIETARY NOTE THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.	
DO NOT SCALE DRAWING SHEET SCALE: 3:1	
DESCRIPTION: 2mm SURFACE MOUNT BOX CONNECTOR STRIP ASM DWG. NO. MMS-1XX-02-XXX-XX-XX-XX-X-XX BY: BRATCHER 04/01/1994	
SHEET 4 OF 4	