

DESIGNED AND DIMENSIONED IN MILLIMETERS[INCHES]
ALL DIMENSIONS REFERENCE EXCEPT AS SHOWN

DO NOT
SCALE FROM
THIS PRINT

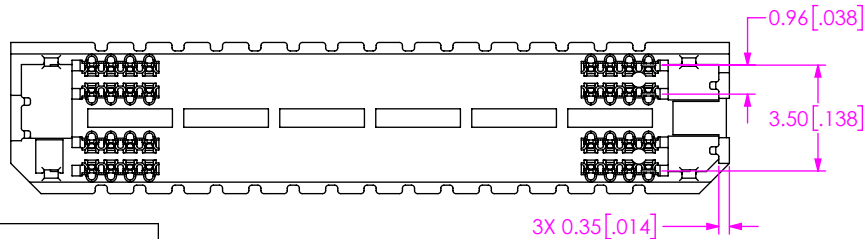
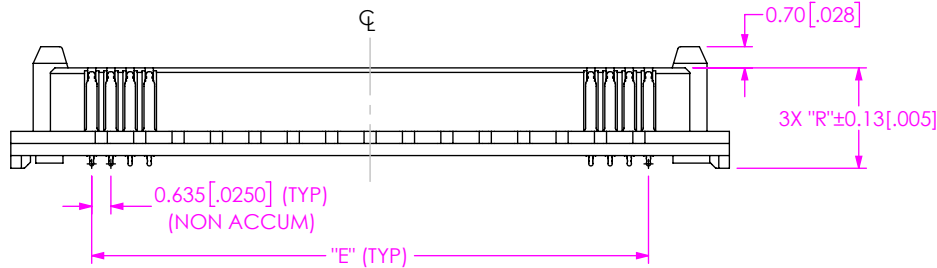

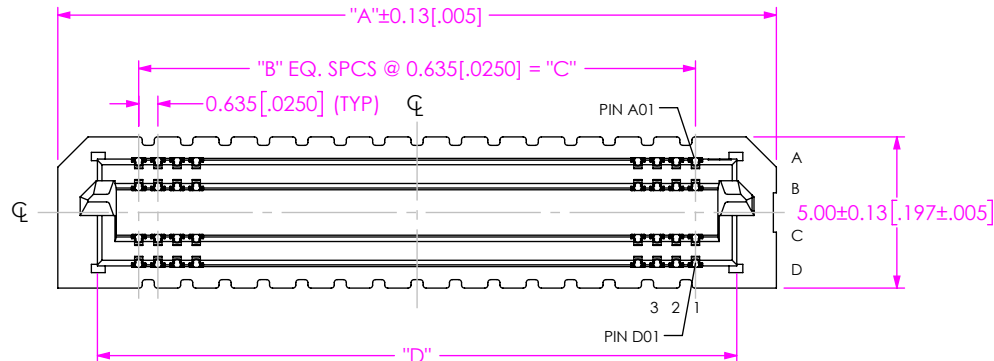
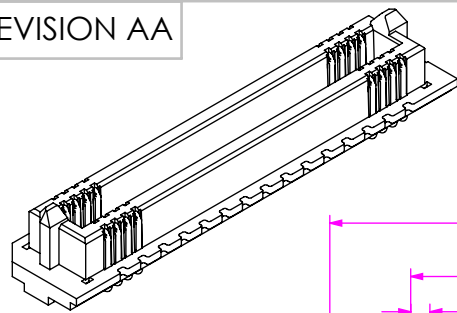


TABLE 3

LEAD STYLE	"G"	"H"	"R"
-01.5	2.900 [0.1142]	0.800 [0.0315]	3.32 [0.131]
-03.5	4.900 [0.1929]	2.800 [0.1102]	5.32 [0.209]
-06.5	7.900 [0.3110]	5.800 [0.2283]	8.32 [0.328]
-08.5	9.900 [0.3898]	7.800 [0.3071]	10.32 [0.406]

FIG 1

ADM6-30-01.5-XXX-4-0-XR SHOWN
(SOME CENTER FEATURES REMOVED FOR CLARITY)

ADM6-XXX-XX.X-XXX-4-X-X-XR

No OF POSITIONS

-10, -20, -30, -40, -50, -60,
-70, -80, -90, -100
(PER ROW)

LEAD STYLE

-01.5: 1.5MM
-03.5: 3.5MM
-06.5: 6.5MM
-08.5: 08.5MM

PLATING SPECIFICATION

-L: 10μ" SELECTIVE GOLD
IN CONTACT AREA,
MATTE TIN ON TAIL
-S: 30μ" SELECTIVE GOLD
IN CONTACT AREA,
MATTE TIN ON TAIL
-STL: 30μ" SELECTIVE GOLD
IN CONTACT AREA,
TIN/LEAD ON TAIL

PACKAGING

(SEE NOTES 1, 3 & 4)
-TR: TAPE & REEL
-FR: FULL REEL QTY TAPE & REEL

OPTION

BLANK: NO ALIGNMENT PIN
-A: ALIGNMENT PIN
(SEE SHT 3, FIG 3)

TERMINATION

-0: COLUMN (SEE NOTE 6)
*Δ-1: BALL (63.0% TIN/37% LEAD)
(ONLY AVAILABLE WITH -STL
PLATING)
**Δ-2: BALL (96.5% TIN/3.0% SILVER
0.5% COPPER)(ONLY
AVAILABLE WITH -S OR -L
PLATING OPTIONS)

4 ROW

(* = NOT RELEASED FOR -03.5, 06.5, 08.5 LEAD STYLES)
(** = NOT RELEASED FOR 70-100 POSITIONS WITH
-08.5 LEAD STYLE)
(Δ=TERMINATION STYLE FOR EXISTING CUSTOMERS ONLY)

TABLE 1

ADM6 LEAD STYLE	STACK HEIGHT			
	-01.5	-03.5	-06.5	-08.5
-03.5	5.00 [0.197]	7.00 [0.276]	10.00 [0.394]	12.00 [0.472]
-07.5	9.00 [0.354]	11.00 [0.433]	14.00 [0.551]	16.00 [0.630]

TABLE 2

No. OF POS. PER ROW	"A"	"B"	"C"	"D" FOR 01.5	"D" FOR -03.5, -06.5, -08.5	"E"
-10	11.07 [0.4356]	9	5.715 [0.2250]	8.445 [0.3325]	8.395 [0.3305]	5.72 [0.2250]
-20	17.42 [0.6856]	19	12.065 [0.4750]	14.795 [0.5825]	14.745 [0.5805]	12.07 [0.4750]
-30	23.77 [0.9356]	29	18.415 [0.7250]	21.145 [0.8325]	21.095 [0.8305]	18.42 [0.7250]
-40	30.12 [1.1856]	39	24.765 [0.9750]	27.495 [1.0825]	27.445 [1.0805]	24.77 [0.9750]
-50	36.47 [1.4356]	49	31.115 [1.2250]	33.845 [1.3325]	33.795 [1.3305]	31.12 [1.2250]
-60	42.82 [1.6856]	59	37.465 [1.4750]	40.195 [1.5825]	40.145 [1.5805]	37.47 [1.4750]
-70	49.17 [1.9356]	69	43.815 [1.7250]	46.545 [1.8325]	46.495 [1.8305]	43.82 [1.7250]
-80	55.52 [2.1856]	79	50.165 [1.9750]	52.895 [2.0825]	52.845 [2.0805]	50.17 [1.9750]
-90	61.87 [2.4356]	89	56.515 [2.2250]	59.245 [2.3325]	59.195 [2.3305]	56.52 [2.2250]
-100	68.22 [2.6856]	99	62.865 [2.4750]	65.595 [2.5825]	65.545 [2.5805]	62.87 [2.4750]

1. TAPE & REEL IS STANDARD PACKAGING.
2. NOTE DELETED.
3. ORDERS WILL BE PACKAGED ACCORDING TO THE SAMTEC PACKAGING EFFICIENCY STANDARDS (SPES) FOUND ON WWW.SAMTEC.COM
4. ATTACH LABEL-4X2 TO EACH REEL.
5. K-DOT PROVIDED AS STANDARD.
6. -L AND -S PLATED PARTS WILL HAVE MATTE TIN ON THE TAIL. -STL PLATED PARTS WILL HAVE TIN/LEAD ON THE TAIL. PARTS ARE SOLDERED WITH OPTIMIZED SOLDER PASTE VOLUMET IN PLACE OF AN ATTACHED SOLDER BALL. FOR MORE INFORMATION, CONTACT SAMTEC'S INTERCONNECT PROCESSING GROUP (IPG@SAMTEC.COM).".

* PROPRIETARY NOTE *

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING
SHEET SCALE: 4:1
MATERIAL:
INSULATOR: LCP, COLOR BLACK
CONTACT: COPPER ALLOY

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.COM code 55322

DESCRIPTION:

ADM6 ASSEMBLY

DWG. NO.

ADM6-XXX-XX.X-XXX-4-X-X-XR

BY: J RUZZI

6/14/2016

SHEET 1 OF 3

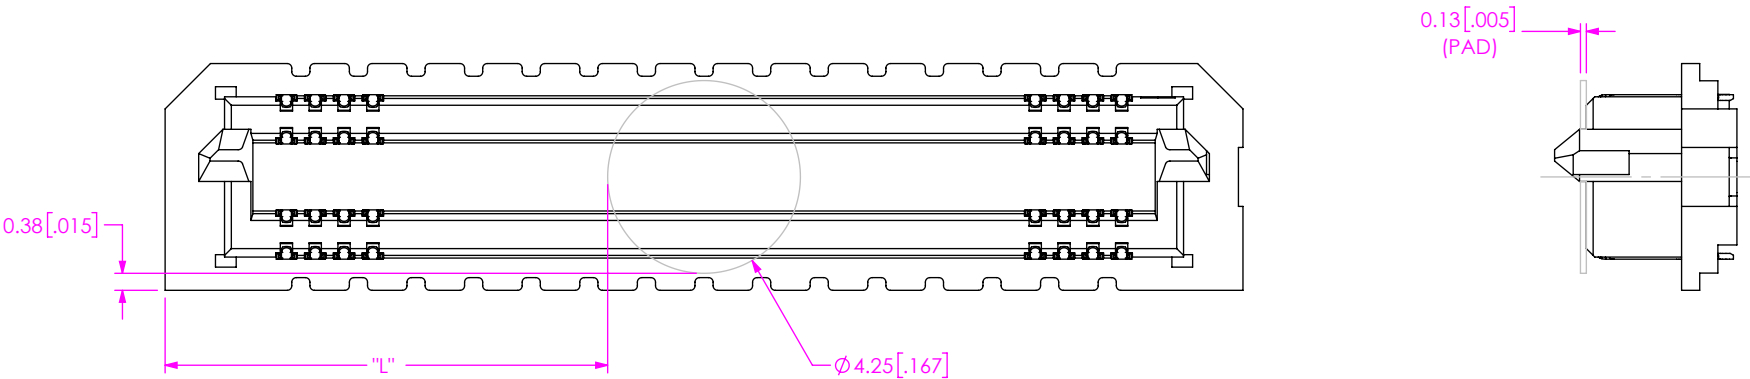


FIG 2
POLYIMIDE PAD
ADM6-30-1.5-XXX-4-0-XR SHOWN
(SAME AS FIG1, EXCEPT AS SHOWN)
(SOME CENTER FEATURES REMOVED FOR CLARITY)

TABLE 4

-No. OF POS PER ROW	"L"
-10	3.41 [0.134]
-20	6.58 [0.259]
-30	9.76 [0.384]
-40	12.93 [0.509]
-50	16.11 [0.634]
-60	19.28 [0.759]
-70	22.46 [0.884]
-80	25.63 [1.009]
-90	28.81 [1.134]
-100	31.98 [1.259]

• PROPRIETARY NOTE • THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.		
	520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322	
	DESCRIPTION: ADM6 ASSEMBLY	
	DWG. NO. ADM6-XXX-XX.X-XXX-4-X-X-XR	
DO NOT SCALE DRAWING	BY: J RUZZI	6/14/2016
SHEET SCALE: 6:1	SHEET 2 OF 3	

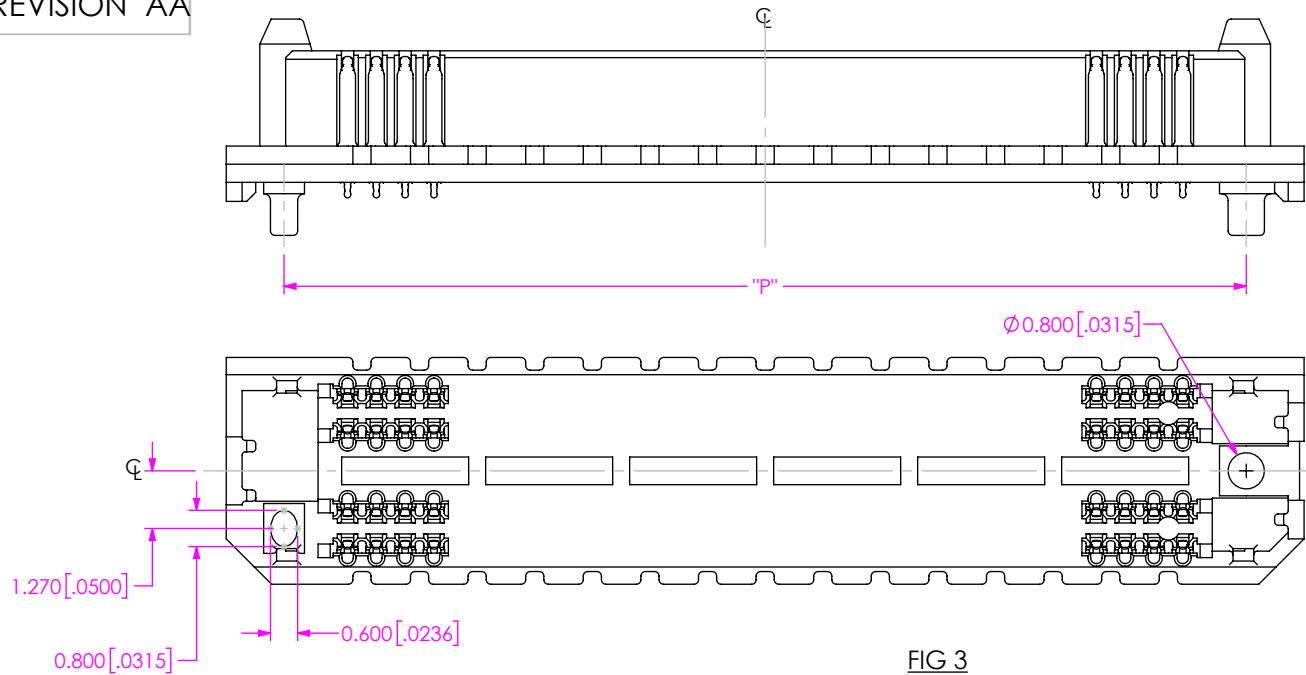


FIG 3
-A: ALIGNMENT PIN
ADM6-30-01.5-XXX-4-0-A-XR SHOWN
(SAME AS FIG 1, EXCEPT AS SHOWN)
(SOME CENTER FEATURES REMOVED FOR CLARITY)

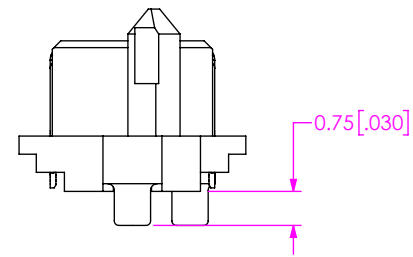


TABLE 6	
No OF POS PER ROW	"P"
-10	8.52 [0.335]
-20	14.87 [0.585]
-30	21.22 [0.835]
-40	27.57 [1.085]
-50	33.92 [1.335]
-60	40.27 [1.585]
-70	46.62 [1.835]
-80	52.97 [2.085]
-90	59.32 [2.335]
-100	65.67 [2.585]

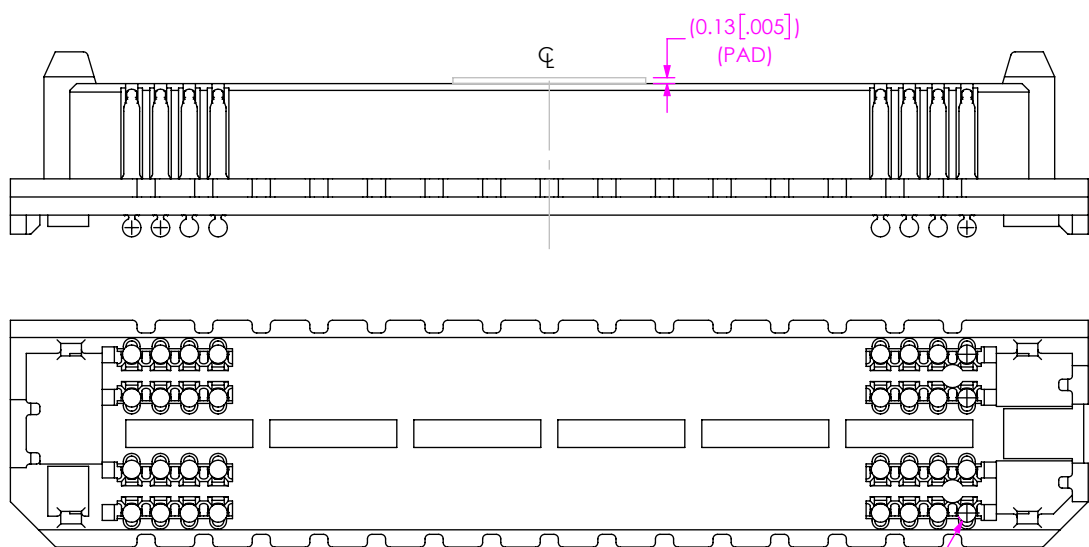


FIG 4
ADM6-30-01.5-XXX-4-X-XR SHOWN
(SAME AS FIG1, EXCEPT AS SHOWN)
(SOLDER BALL OPTION)
(SOME CENTER FEATURES REMOVED FOR CLARITY)

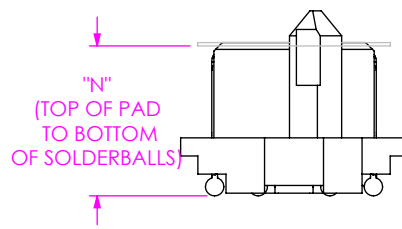


TABLE 5	
LEAD STYLE	"N"
-01.5	3.53 [0.139]
-03.5	5.53 [0.218]
-06.5	8.53 [0.336]
-08.5	10.53 [0.415]

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

samtec
520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail info@SAMTEC.com code 55322

DO NOT SCALE DRAWING SHEET SCALE: 6:1	DESCRIPTION: ADM6 ASSEMBLY	
	DWG. NO. ADM6-XXX-XX.X-XXX-4-X-X-XR	
	BY: J RUZZI	6/14/2016 SHEET 3 OF 3