V23061B1007A301 ✔ ACTIVE

SCHRACK | SCHRACK Low Power PCB Relays

TE Internal #: 1-1393223-7

SCHRACK Low Power PCB Relays, Power Relays, Standard, Monostable, DC, 200 – 300mW Coil Power Rating Class, 254mW Coil Power Rating DC

View on TE.com >

Relays, Contactors & Switches > Relays > Power Relays



Power Relay Type: **Standard**

Coil Magnetic System: **Monostable, DC**

Coil Power Rating Class: **200 – 300 mW**

Coil Power Rating DC: **254 mW**

Coil Resistance: **2270 Ω**

Features

Product Type Features

Power Relay Type	Standard

Electrical Characteristics

Insulation Initial Dielectric Between Coil & Contact Class	3500 – 4000 V
Insulation Initial Dielectric Between Contacts & Coil	1000 V
Contact Limiting Making Current	10 A
Contact Limiting Short-Time Current	8 A
Insulation Creepage Class	5.5 – 8 mm
Contact Limiting Continuous Current	8 A
Insulation Creepage Between Contact & Coil	8 mm[.315 in]
Contact Limiting Breaking Current	8 A
Coil Magnetic System	Monostable, DC
Coil Power Rating Class	200 – 300 mW
Coil Power Rating DC	254 mW
Coil Resistance	2270 Ω
Coil Special Features	UL Coil Insulation Class A
Coil Voltage Rating	24 VDC
Contact Switching Load (Min)	100mA @ 12V
Contact Switching Voltage (Max)	400 VAC

Contact Voltage Rating	250 VAC

Body Features

Product Weight	11 g[.388 oz]

Contact Features

Contact Arrangement	1 Form C (CO)
Contact Current Class	5 – 10 A, 16 A
Contact Current Rating (Max)	8 A
Contact Material	AgSnO2
Contact Number of Poles	1
Terminal Type	PCB-THT

Mechanical Attachment

Relay Mounting Type	Printed Circuit Board

Dimensions

Length Class (Mechanical)	25 – 30 mm
Width Class (Mechanical)	8 – 10 mm
Product Width	10 mm[.394 in]
Product Length	30 mm

Usage Conditions

Environmental Ambient Temperature Class	70 – 85 °C
Environmental Ambient Temperature (Max)	85 °C[185 °F]
Environmental Category of Protection	RTIII

Packaging Features

Packaging Method	Tube

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2020 (205) Candidate List Declared Against: JUL 2019 (201)

	Does not contain REACH SVHC
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2020 (205) Candidate List Declared Against: JUL 2019 (201)
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles'(Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts



TE Model / Part # 9-1393222-1
V23061B1005A301=MINISTARKSTROM



TE Model / Part # 3-1393223-7
V23061B1009A301=MINISTARKSTROM

Also in the Series | SCHRACK Low Power PCB Relays

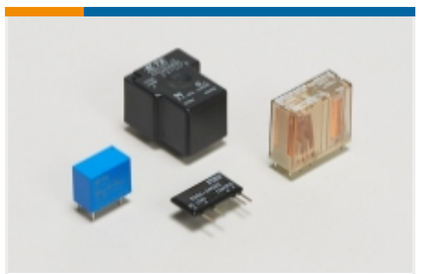

Power Relays(21)

Customers Also Bought



TE Model / Part #1-1393779-8
V23101D 7A201



TE Model / Part #4-1625892-5
3W SM M/OX 5% 39K



TE Model / Part #3-1625892-5
3W SM M/OX 5% 27K



TE Model / Part #1-1956170-6
RY211012R



TE Model / Part #1-1393774-2
V23026A1004B201



TE Model / Part #7-1625892-2
3W SM M/OX 5% 82K



TE Model / Part #8-1393215-1
V23057-B0006-A201



TE Model / Part #1624134-2
23E 220KA 6.35X50FL B7 CAT



TE Model / Part #1-1393779-6
V23101D 6B201



TE Model / Part #3-1393203-1
V23148-A1107-A101

Documents

CAD Files

3D PDF

3D

Customer View Model
ENG_CVM_CVM_1-1393223-7_A.2d_dxf.zip

English

Customer View Model
ENG_CVM_CVM_1-1393223-7_A.3d_igs.zip

English

Customer View Model
ENG_CVM_CVM_1-1393223-7_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

Industrial Relays Quick Reference Guide

English

Miniature Power PCB Relay MSR

English

Product Specifications

Definitions Relays

English

Product Environmental Compliance

MD_1-1393223-7_07072014856_dmtec

English

MD_1-1393223-7_07072014856_dmtec

English