





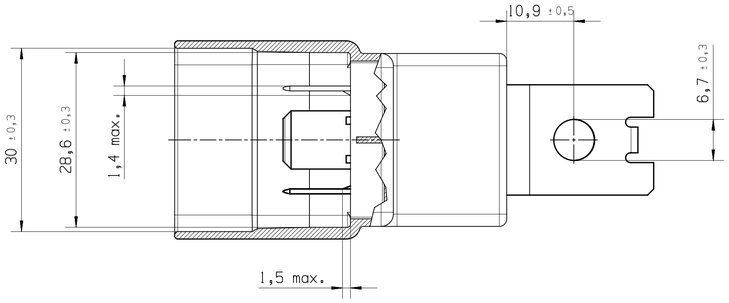

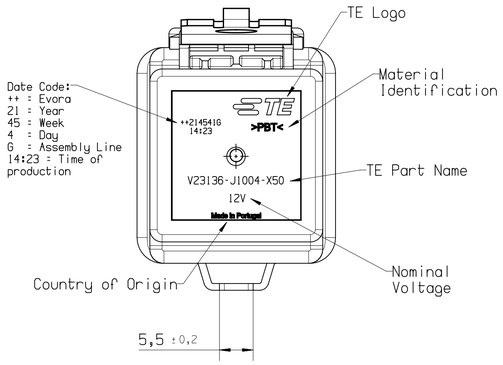

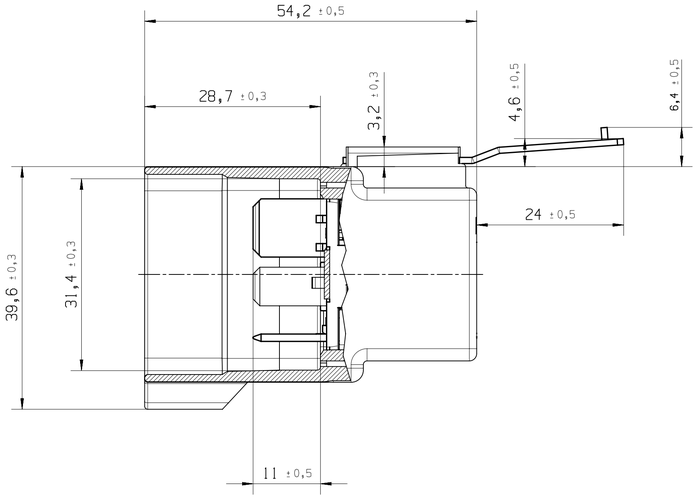

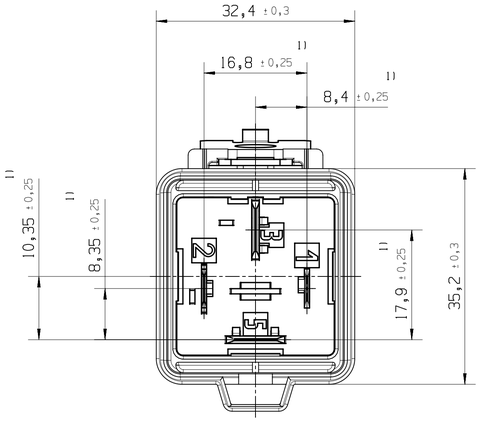

Dustproof;
Protection class IP 54 acc. to IEC 529 (EN 60 529) with mounting bracket.
Terminals shape similar to ISO 8092-1:
Coil Terminals 6.3 mm ± 0.1 mm x 0.8 mm ± 0.05 mm
Load Terminals 9.5± 0.1 mm x 1.2 mm ± 0.05 mm


Integrated component: Resistor 560 Ohm

PART	MATERIAL	COLOUR
Bracket	St2	Pre-Zinc coating
Cover	PBT GF 30	Black sim. to RAL 9005
Base	PA 66 GF 25	Black sim. to RAL 9005
Coil Terminals 1 and 2	E-Cu	Pre-tinned Sn
Load Terminals 3 and 5	E-Cu	Pre-tinned Sn

1) At Base level.

Nominal voltage: 12V
Coil resistance: 90 ±10% at 23° C
Equivalent Resistance: 77.5 ±10% at 23° C

Circuit Diagram



Part number	REV	TE PART NAME	Country of Origin
1-1414122-0	A	V23136-J1004-X050	Portugal

PROPRIETARY
THE REPRODUCTION, TRANSMISSION OR USE OF THIS DOCUMENT OR IT'S CONTENTS IS NOT PERMITTED WITHOUT EXPRESSED WRITTEN AUTHORITY. OFFENDERS WILL BE LIABLE FOR ALL DAMAGES. ALL RIGHTS, INCLUDING RIGHTS CREATED BY REGISTERED PATENT(S) GRANTED FOR A UTILITY MODEL OR DESIGN, ARE RESERVED.

CHANGES TO THIS DRAWING MUST BE DONE ONLY IN CAD

PAPER SIZE A1

APPLICABLE SPEC.:

FINISH
DIMENSIONS APPLY PLATING

TOLERANCE UNLESS SPECIFIED OTHERWISE
DIN 16901-130
DIMENSIONS IN MM

SCALE 1:1; 2:1
WEIGHT
MATERIAL See table

REV.	CHANGE ORDER	DATE	APP.
C3	ECN-22-190151	30OCT2022	LSan
C2	ECN-22-180088	01OCT2022	LSan
C1	ECO-15-007741	22MAY2015	LSan
C	---	24-03-2009	LSan
B	---	23-09-2008	LSan
A	---	13-11-2006	CFR
01	WE05/A049	01-02-2005	CRZ
S1	Pending AM	28-01-2005	CRZ

	DATE	NAME
DWN.	17-01-2005	CRUZ
APP.		
REV.		
LOCATION	AMB PE EVORA	

PART NAME
POWER RELAY F-A SHROUDED
Dimensional drawing

DWG NO.
C-V23136-J1004-X050-CD

SHT. 1 OF 1

CUSTOMER DRAWING